



# NESTAFLEX

## 376AL/FL FLEXIBLE GRAVITY CONVEYOR

### DETAILS

#### **FLEXIBILITY**

Able to bend and twist as needed to go around obstacles. Conveyors can curve up to 180°.

#### **SELF TRACKING**

Cartons will follow the twists and turns of the conveyor path without using engineered curves.

#### **EXPANDABILITY**

Designed to expand and contract as needed to help with the loading and unloading process and minimize storage footprint.

#### **DURABLE SKATE WHEELS**

Zinc plated skate wheels with steel ball bearings provide maximum durability which make them ideal for shipping and receiving applications.

The NESTAFLEX 376AL/FL is a heavy duty, gravity conveyor that features double welded cross braces and heavy duty square tubing legs available in adjustable height legs (AL) and fixed height legs (FL). This all bolted design uses shoulder bolts, steel lock nuts and is additionally secured with industrial thread lock to help reduce maintenance. The four point leg connection gives additional strength to the conveyor to make it last longer. The NESTAFLEX 376AL/FL is designed to provide the support necessary to handle heavy packages in high volume environments.

The NESTAFLEX 376AL/FL has a proven track record in the industry and is the choice for medium to high volume shipping and receiving departments in distribution centers, retail stores, and manufacturing and assembly operations.



C O N V E Y O R S

A DURAVANT COMPANY

# NESTAFLEX

## 376 AL/FL FLEXIBLE GRAVITY CONVEYOR

### STANDARD SPECIFICATIONS

LOAD CAPACITY	376 lbs/ft
STANDARD SKATE WHEEL	Zinc Plated Steel
OPTIONAL SKATE WHEELS	Black Polymer & Red Polymer
STANDARD AXLE CENTERS	Standard: 5.25 in / Optional: 3 & 4 in
AXLE SIZE	5/16 in
CONVEYOR WIDTHS	18 / 24 / 30 / 36 in
CONVEYOR LENGTHS	8 - 60 ft
CONVEYOR HEIGHTS	Adjustable 20 - 53 in
STANDARD CASTER SIZE	5 x 1.5 in – up to 40 ft 6 x 2 in – over 40 ft
OPTIONAL CASTER SIZE	8 x 2 in
SIDE LINK CONSTRUCTION	7 gauge steel
LEG DESIGN	Zinc Plated w/ welded double braces

### MORE DETAILS

Fixed leg (FL ONLY) height adjustments determined per application and are preset by set screws or hand knob

#### ACCESSORIES / OPTIONS

Additional brake casters  
Additional set of couplers  
Additional side handles  
Curve Guards  
Swing Stick  
T-Junction


#### WARRANTY

MECHANICAL: 24 Months

#### SERVICES AVAILABLE

Technical Support  
Installation & Service  
Preventative & Routine Maintenance  
Application Support  
Operator & Maintenance Training

OPTIMAL PACKAGE SIZE FOR AXLE CENTERS	
AXLE CENTER LENGTH	PACKAGE SIZES
5.25 in	15 in & Larger
4 in	12 in & Larger
3 in	9 in & Larger

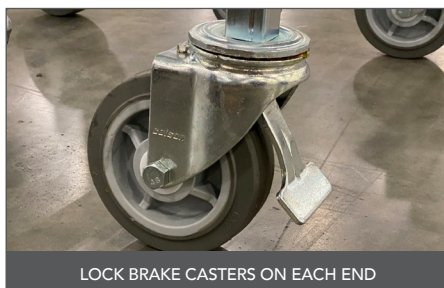

VISIT OUR WEBSITE TO LEARN MORE :: [WWW.FMHCONVEYORS.COM](http://WWW.FMHCONVEYORS.COM)



FMH CONVEYORS IS A MEMBER OF THE DURAVANT FAMILY OF COMPANIES

PACKAGING SOLUTIONS | FOOD PROCESSING SOLUTIONS | MATERIAL HANDLING SOLUTIONS | SUPPORTPRO

[www.duravant.com](http://www.duravant.com)